(30) Priority data:

WORLD INTELLECTUAL PROPERTY ORGANIZATION



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:
H04B 1/16

A1
(11) International Publication Number: WO 90/11652
(43) International Publication Date: 4 October 1990 (04.10.90)

US

(21) International Application Number: PCT/US90/01336

(22) International Filing Date: 13 March 1990 (13.03.90)

325,603 20 March 1989 (20.03.89)

(71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(72) Inventor: SOBTI, Arun; 2057 Sherwood Place, Wheaton, IL 60187 (US).


(74) Agents: PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(81) Designated States: AT (European patent), BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent).

Published

With international search report.

(54) Title: DSP BASED RADIO WITH DIMINISHED POWER REQUIREMENTS

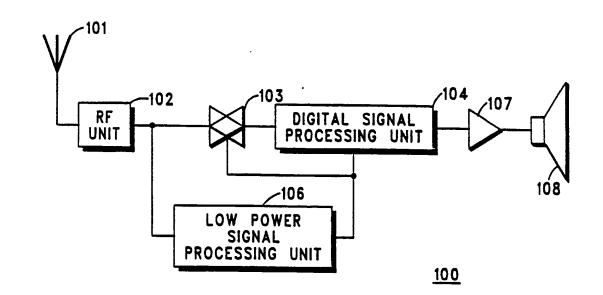

(57) Abstract

A radio (100) having two signal processing paths, one including a digital signal processor (104) that consumes a relatively large amount of power and one including a signal processor (106) that consumes a relatively small amount of power. The low power processor (106) operates to monitor for broadcast signals of interest. Upon detecting such a signal, the low power processor (106) enables the digital signal processor (104) to facilitate proper signal processing.

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

ΑT	Austria	ES	Spain	MG	Madagascar
AU	Australia	F	Finland	ML	Mali
BB	Barbados	FR	France	MR	Mauritania
BE	Belgium	GA	Gabon	MW	Malawi
BF	Burkina Fasso	GB	United Kingdom	NL	Netherlands
BG	Bulgaria	HU	Hungary	NO	Norway
BJ	Benin	TT.	Italy	80	Romania
BR	Brazil	æ	Japan	SD	Sudan
CA	Canada	KP	Democratic People's Republic	SE	Sweden
Œ	Central African Republic		of Korea	SN	Senegal
CG	Congo	KR	Republic of Korea	SU	Soviet Union
CH	Switzerland	u	Liechtenstein	Œ	Chad
CM	Cameroon	LK	Sri Lanka	TG	Togo
DΕ	Germany, Federal Republic of	w	Luxembourg	US	United States of Americ
DK	Denmark	MC	Massen		

1

5

DSP BASED RADIO WITH DIMINISHED POWER REQUIREMENTS

10

Technical Field

This invention relates generally to radios, and more particularly to radios that include a digital signal processor.

15

20

25

30

Background Art

Radios generally function to receive broadcast signals.

Usually, the user of a radio will not be interested in all of the signals that are broadcast on a communication resource (such as a particular frequency or a particular TDM time slot). Since many broadcast signals of interest include an identifying signal or other identifying indicia, many radios include a signal processor that examines the received broadcast signal to determine the presence of the identifying signal. If present, the radio can be further enabled to render the broadcast signal audible, visible, or otherwise as appropriate for that particular broadcast signal.

For example, some radios remain squelched unless a carrier can be sensed on a particular monitored communication resource. Other broadcast signals include special identifying signals, such as tone signals or subaudible digital signals, that the radio can recognize and respond to. Yet other signals of interest can be

5

10

15

20

25

30

prefaced with a specific identifying preamble, such as an ID for the intended radio.

In order to expand the capabilities and flexibility of radios, digitizers and digital signal processors (DSPs) have been used. These processors typically receive digitized received signals. Further processing of the signal, equivalent to IF and discriminator processing, then occurs in the DSP in a digital manner. The resultant signal can then be converted into analog form and processed further as appropriate. For example, the resultant signal may be rendered audible in the case of a voice transmission.

DSPs, however, consume a significant amount of power when operating. This becomes a particular problem when seeking to use a DSP in a portable radio with limited power resources. DSP power consumption becomes of particular concern when the DSP operates both in the presence and absence of a broadcast signal of interest. Typically, the DSP must operate even in the absence of a broadcast signal of interest because the DSP itself aids in detecting the presence of a broadcast signal of interest. Unless the broadcast signals of interest occur at known times, the DSP must remain active in order to detect the signal when it occurs.

Summary of the Invention:

This invention allows a DSP to be used in a radio while avoiding the necessity of continuous DSP operation.

The invention includes generally two signal processing units; the first includes the DSP and the second includes a processing unit having lesser capabilities and smaller power requirements. The DSP based signal processing unit functions to fully process broadcast signals of interest. The low power processing unit functions to detect the presence of a broadcast signal of interest, and upon detecting

3

such a signal, the low power processing unit enables the DSP based processing unit to begin functioning.

Through use of this invention, the high power requirements of the DSP based processing unit are necessitated only when a broadcast signal of interest exists. Otherwise, a lower power broadcast signal of interest detection mechanism monitors the communication resource.

Brief Description of the Drawings:

10

20

25

30

Fig. 1 comprises a block diagram depiction of the invention;

Fig. 2 comprises a block diagram depiction of the low power signal processing unit.

15 Best Mode for Carrying out the Invention:

Referring to Fig. 1, a radio (100) includes generally an antenna (101) for receiving broadcast signals and an RF unit (102) for appropriately processing the received broadcast signals. The received signals are then passed to a low power signal processing unit (106) and also through an appropriate gate (103) to a digital signal processing unit (104) (the latter typically including a DSP such as the Motorola 56000 and a microprocessor to control the DSP). The output of the digital signal processing unit (104) then couples to an appropriate amplifier (107) and speaker (108) or other output devices as appropriate to the type of message received.

With reference to Fig. 2, the low power signal processing unit (106) includes an appropriate IF unit (201) for receiving the output signal from the RF unit (102), a discriminator (202) for processing the IF unit (201) output to aid in recovering the original modulating signal, and a processing unit (203) for examining the recovered signal and determining whether an appropriate identifying signal is

4

5

10

15

present. The processing unit (203) could be any relatively simple and low power device, such as a Motorola MC6303 processor.

Upon detecting the presence of a broadcast signal of interest, the processing unit (203) of the low power signal processing unit provides a signal to the gate (103), thereby allowing the RF signal to be provided to the digital signal processing unit (104). At the same time, the processing unit (203) provides an enable signal to the digital signal processing unit (104) to activate that unit and cause it to begin processing the incoming signal.

So configured, the digital signal processing unit will operate only when a broadcast signal of interest can be detected. Otherwise, the low power signal processing unit will monitor the received broadcast signals and control the activation of the digital signal processing unit as a function of the presence and absence of a broadcast signal of interest.

5

I claim:

5

10

1) A radio having signal receiving means for receiving broadcast signals, and digital signal processing means that requires a first amount of power to operate for converting the received broadcast signal into a first signal, characterized by:

A) switch means:

responsive to a control signal; and being operably coupled between the signal receiving means and the digital signal processing means;

for selectively allowing the broadcast signal as received by the signal receiving means to be provided to the digital signal processing means;

B) low power signal processing means:

operably coupled to the signal receiving means; and
requiring a second amount of power, said second
amount of power being less than the first amount of power;
for detecting a broadcast signal of interest and providing a


control signal to the switch means in response thereto.


6

5

2) A radio having signal receiving means for receiving broadcast signals, and digital signal processing means that requires a first amount of power to operate for converting the received broadcast signal into a first signal, characterized by low power signal processing means:

operably coupled to the signal receiving means; and requiring a second amount of power, said second amount of power being less than the first amount of power; for detecting a broadcast signal of interest and providing a control signal to the digital signal processing means to substantially control power consumption of the digital signal processing means.

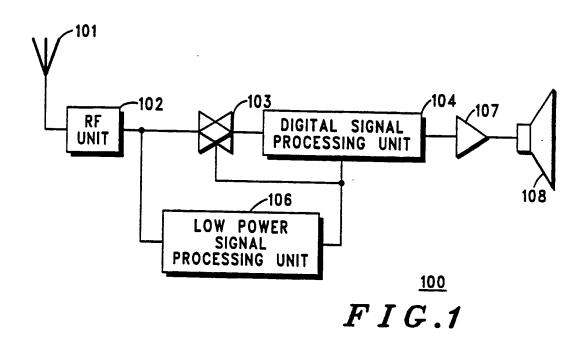

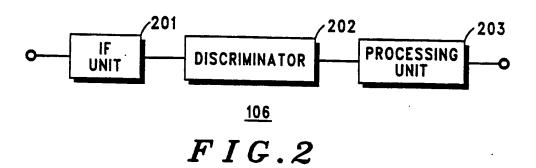

INTERNATIONAL SEARCH REPORT								
I CLASS		•	International Application No.	PCT/US90/01336				
According	o to Internati	N OF SUBJECT MATTER (if several classification (ISC)	ssification symbols apply, indicate all) 6					
	C (5) :	onal Patent Classification (IPC) or to both N	fational Classification and IPC					
4	S. Cl :	. 455/343						
	S SEARCH							
		Minimum Docur	nentation Searched 7					
Classificati	on System		Classification Symbols	· · · · · · · · · · · · · · · · · · ·				
U.S	U.S. 455/127,214,229,343,335							
	-	Documentation Searched othe to the Extent that such Documen	er than Minimum Oocumentation nts are Included in the Fields Searched ⁸					
		ONSIDERED TO BE RELEVANT						
Category *	Citatio	on of Document, 11 with indication, where ap	ppropriate, of the relevant passages 12	Relevant to Claim No. 13				
Y	US,A	4,419,765 (WYCOFF)		1-2				
]	ı	See Figure 1 and Colum	m 5, Lines 13-26.					
				İ				
				ļ				
				1				
1								
1]				
.			•					
1				1				
1				1				
1				1				
1				1				
ļ								
				İ				
* Special	categories o	of cited documents: 10	"T" later document published after th	e international filing date				
COMBI	100100 (0 00	g the general state of the art which is not of particular relevance	cited to understand the principle					
"E" earlie		but published on or after the international	invention "X" document of particular relevance					
"L" docu	ment which	May throw doubte on priority eleigns) or	cannot be considered novel or involve an inventive step	s; the claimed invention cannot be considered to				
citatio	on or other s	special reason (as specified)	"Y" document of particular relevance	e; the claimed invention				
"O" docui	ment referrin r means	g to an oral disclosure, use, exhibition or	document is combined with one	or more other such does				
"P" docur	ment publish	ed prior to the international filing date but only date claimed	ments, such combination being of in the art. "å" document member of the same programment.	bvious to a person skilled				
IV. CERTIF	FICATION		a assument transact or the source by	itent family				
Date of the	Actual Comp	pletion of the International Search	Date of Mailing of this International Sea	irch Report				
	ay 1990		12JUL 1990					
International	Searching A	Authority	Signature of Authorized Officer	, //				
ISA/I	IIS	!	Edward Hohan Wheel	7 0				
*****	72		Edward Ordan -	•				